



# Application Note

## **PCIE Series Final Inch® Designs in PCI Express Applications Generation 2 – 5.0 Gbps**

Revision Date: March 24, 2006

**Copyrights and Trademarks**  
Copyright © 2006 Samtec, Inc.

Developed in conjunction with  
Teraspeed Consulting Group LLC

**Series:** PCIE (PCI Express Standard Connector)  
**Standard:** PCI Express, Generation 2 (5.0 Gbps)

## COPYRIGHTS, TRADEMARKS, and PATENTS

Final Inch® is a trademark of Samtec, Inc. Other product names used herein are trademarks of their respective owners. All information and material in this publication are property of Samtec, Inc. All related rights are reserved. Samtec, Inc. does not authorize customers to make copies of the content for any use.

### ***Terms of Use***

Use of this publication is limited to viewing the pages for evaluation or purchase. No permission is granted to the user to copy, print, distribute, transmit, display in public, or modify the contents of this document in any way.

### ***Disclaimer***

The information in this publication may change without notice. All materials published here are “As Is” and without implied or expressed warranties. Samtec, Inc. does not warrant this publication will be without error, or that defects will be corrected. Samtec, Inc. makes every effort to present our customers an excellent and useful publication, but we do not warrant or represent the use of the materials here in terms of their accuracy, reliability or otherwise. Therefore, you agree that all access and use of this publication's content is at your own risk.

NEITHER SAMTEC, INC. NOR ANY PARTY INVOLVED IN CREATING, PRODUCING, OR DELIVERING THIS PUBLICATION SHALL BE LIABLE FOR ANY DIRECT, INCIDENTAL, CONSEQUENTIAL, INDIRECT, OR PUNITIVE DAMAGES ARISING OUT OF YOUR ACCESS, USE OR INABILITY TO ACCESS OR USE THIS PUBLICATION, OR ANY ERRORS OR OMISSIONS IN ITS CONTENT.

**Series:** PCIE (PCI Express Standard Connector)  
**Standard:** PCI Express, Generation 2 (5.0 Gbps)

## **Abstract**

PCI Express is primarily intended as a high performance serial interface targeted for use in desktop, mobile, workstation, server, communications platforms, and embedded devices. As with any modern high speed PCB design, the performance of an actual PCI Express interconnect is highly dependent on the implementation. This paper describes a measurement method applied to proven Samtec Final Inch® designs and this industry standard to help engineers deploy systems of two PCB cards mated through Samtec's family of high speed electrical connectors. To demonstrate the feasibility of using Samtec PCIE Series PCI Express connectors with standard FR4 epoxy PCBs, informative interconnect loss and jitter values will be measured through SPICE simulation and presented in spreadsheet format. Also, trace lengths on the motherboard side of the PCIE Series connector will be gradually increased to show the limits of compliance.

In order to ensure interoperability between PCI Express transmitter and receiver devices, we will stress a typical interconnect design by stimulating their SPICE model components and devices with stressed data patterns. This paper will cover techniques to stress the system with reduced driver amplitude as well as jitter and noise injection.

**Series:** PCIE (PCI Express Standard Connector)  
**Standard:** PCI Express, Generation 2 (5.0 Gbps)

## Introduction

Samtec has developed a full line of connector products that are designed to support serial speeds greater than 5.0 Gbps, the “Baud rate” of each PCI Express Generation 2 data lane. Working with Teraspeed Consulting, they have developed a complete breakout and routing solution for each member of Samtec’s line of high speed connectors, called Final Inch®. To demonstrate the feasibility of using Samtec PCIE Series connectors in PCI Express applications with standard FR4 epoxy PCBs, informative interconnect loss and jitter values will be measured through SPICE simulation and presented in a user-friendly spreadsheet format. Trace lengths will be varied to show the limits of compliance.

Analysis will consist of stimulating a typical trace-connector-trace circuit path with a worst case signal and then observing the corresponding eye closure related to reflections due to impedance discontinuities, loss, and stubs. Next, utility software will be used to extract, analyze, and format SPICE-measured voltage amplitudes and differential signal crossing times. Mask violations (see Figure 4) will be recorded in pass/fail format.

## Definitions

**Interconnect Budget** – The amount of loss and jitter that is allowed in the interconnect and still meet the target specification.

**Loss** – The differential voltage swing attenuation from transmitter to receiver on the trace. The trace is subject to resistive, dielectric, and skin effect loss. Loss increases as trace length and and/or signal frequency increases. Vias and connectors also exhibit losses which must be included in the interconnect budget. Total loss allowed in the interconnect is 13.2 dB.

**Jitter** – The variation in the time between differential crossings from the ideal crossing time. Jitter includes both data dependent and random contributions on the interconnect. Total jitter allowed is 0.3UI, or 120 ps when UI = 400 ps.

**PRBS** – Pseudo Random Bit Sequence.

**T<sub>j</sub>** – Total jitter, which is the convolution of the probability density functions for all the jitter sources, Random jitter (R<sub>j</sub>) and Deterministic jitter (D<sub>j</sub>). The UI allocation is given as the allowable T<sub>j</sub>. The PCI Express specification does not specify allocation of R<sub>j</sub> and D<sub>j</sub>.

**UI** – Unit Interval. The time interval required for transmission of one data symbol. For a binary lane operating at 5.0 Gbps, the UI is 400 ps.

**Series:** PCIE (PCI Express Standard Connector)  
**Standard:** PCI Express, Generation 2 (5.0 Gbps)

$V_{DIFF}$  – Differential voltage, defined as the difference of the positive conductor voltage and the negative conductor voltage ( $V_{D+} - V_{D-}$ ).

$V_{DIFFp-p}$  – Differential peak-to-peak voltage, defined by the following equations:

$$V_{DIFFp-p} = (2 * \max | V_{D+} - V_{D-} |) \text{ (Applies to a symmetric differential swing)}$$

$$V_{DIFFp-p} = (\max | V_{D+} - V_{D-} | \{ V_{D+} > V_{D-} \} + \max | V_{D+} - V_{D-} | \{ V_{D+} < V_{D-} \})$$

(Applies to a asymmetric differential swing)

## The PCI Express Specification

PCI Express links are based on recent advances in point-to-point interconnect technology. A PCI Express link is comprised of a dual-simplex communications channel between two components physically consisting of two low-voltage, differential signal pairs. The PCI Express Base Specification defines one half of a link (one transmitter and receiver) an electrical sub-block. The design model used for this paper is of three electrical sub-blocks operating in tandem, the victim surrounded by two aggressors with all bit streams heading in the same direction.

The PCI Express specification is available through the PCI Sig organization (<http://www.pcisig.com>) by becoming a member. Detailed specifications for an electrical sub-block can be found in the PCI Express 2.0 Base Specification and will be referred to throughout the rest of this paper. Measurement techniques specified in this section have been rigidly adhered to including the requirement for finding the median within the jitter for use in jitter measurements.

## Setup and Measurement

### *Input Stimulus Setup*


A PRBS  $2^7-1$  pattern was used for victim stimulus pair and a repeating 1010... pattern used for the aggressor pairs, one on each side of the victim pair. A stimulus generator is built into the SiSoft SiAuditor design analysis tool along with the capability to add jitter to the driver stimulus. This was used to add enough jitter to just meet worst case PCI Express transmit jitter specifications. The slow-slow corner driver behavioral model was used to come as close as possible to the minimum differential  $V_{DIFFp-p}$  output and slew rate specification.

**Series:** PCIe (PCI Express Standard Connector)  
**Standard:** PCI Express, Generation 2 (5.0 Gbps)

### ***The Test Circuit Model***

The test circuit modeled is shown in Figure 1. It consists of the following:

- One set of Teraspeed behavioral models for PCI Express drivers.
- One set of six AC coupling capacitors, value = 100 nF.
- 1 Samtec PCIe Series Final Inch® design, comprised of the connector model for Samtec P/N PCIe-64-02-F-D-TH attached to a standard edge card, and lossy differential trace models on both sides of the connector. Breakouts are included in the connector model as well as short sections of trace. These breakout trace lengths were compensated for in the lengths simulated and reported.
- One set of Teraspeed behavioral models for PCI Express receivers with on-die termination.

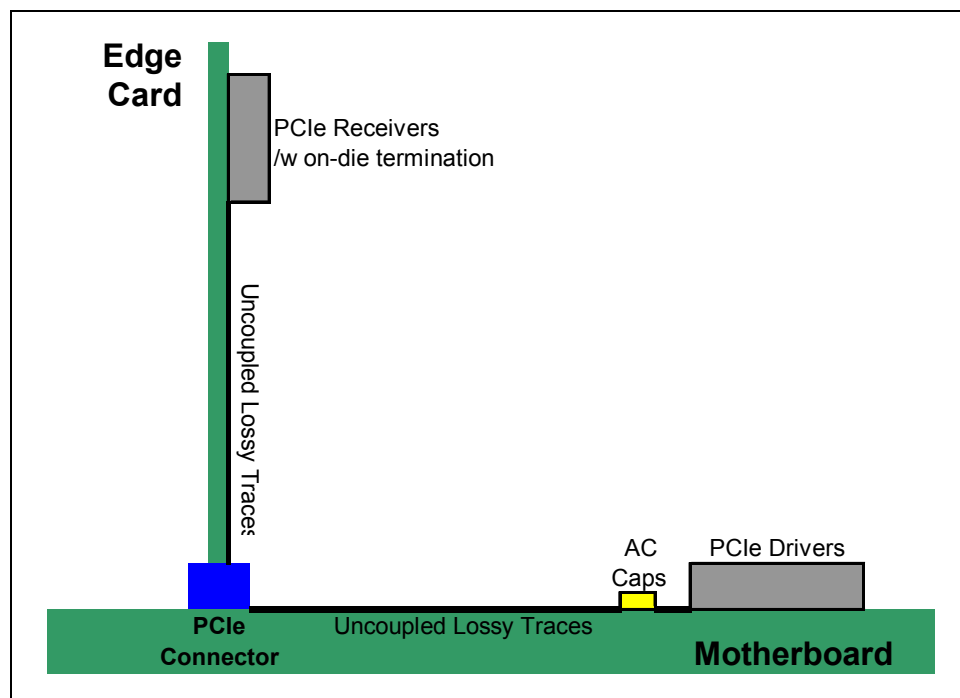

**Figure 1— PCI Express Test Circuit (can we update the pic with PCIe Series)**

**Series:** PCIe (PCI Express Standard Connector)  
**Standard:** PCI Express, Generation 2 (5.0 Gbps)

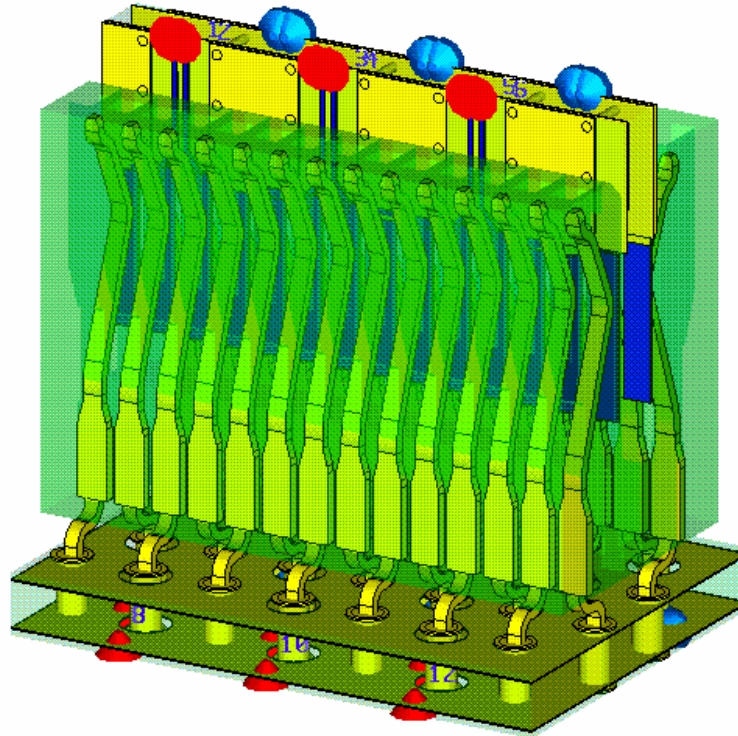


Figure 2 – X-Ray image of PCIe Series through hole connector section with edge card installed

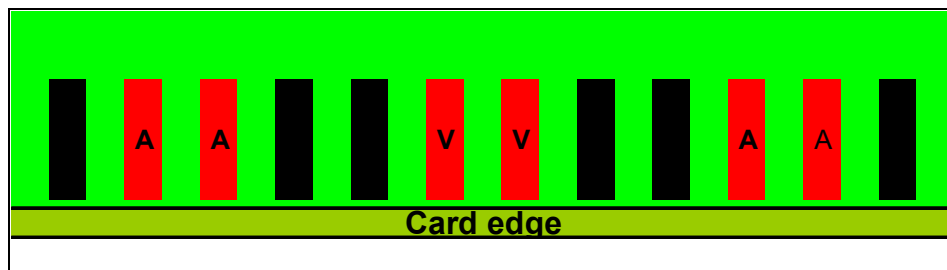


Figure 3 – PCIe Series edge card connector pad pattern; V = Victim, A = Aggressor

**Series:** PCIe (PCI Express Standard Connector)  
**Standard:** PCI Express, Generation 2 (5.0 Gbps)

## Procedure

### Interconnect Budget

The interconnect budget can be best illustrated by the mask shown in Figure 4. In order to pass the PCI Express constraints for loss and jitter, the simulated eye waveform must not touch any location within the grey areas shown. Calculated interconnect budget values are shown in Table 1.

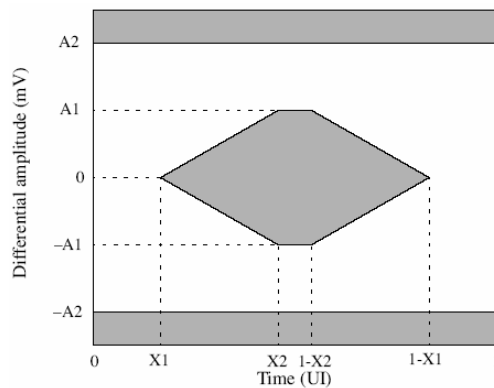


Figure 4 - Example eye mask template

	Maximum Loss, A1 to -A1 (See example mask template) ( $V_{DIFFp-p}$ )	Minimum Eye Width, X1 to 1-X1 (See example mask template) ( $UI_{p-p}$ )
Driver at Package Pin	0.800	0.7
Receiver at Package Pin	0.175	0.4
Interconnect budget:	13.2 dB loss <sup>1</sup>	0.3 UI (60ps when UI = 200 ps)

Table 1 - PCI Express interconnect budget max loss and min eye width calculated values

<sup>1</sup>The worst case operational loss budget at 2.5 GHz Nyquist frequency is calculated by taking the minimum driver output voltage ( $V_{TX-DIFFp-p} = 800$  mV) divided by the minimum input voltage to the receiver ( $V_{RX-DIFFp-p} = 175$  mV).  $175/800 = .219$ , which after conversion results in a maximum loss budget of 13.2 dB.

**Series:** PCIE (PCI Express Standard Connector)  
**Standard:** PCI Express, Generation 2 (5.0 Gbps)

### Transmitter Compliance Measurements

#### Setup for Tj for UI Measurements

Before the PCI Express circuit model can be simulated and measured, we must first set up the driver stimulus to provide minimum TX eye width (maximum jitter) and minimum amplitude. As mentioned in the previous section, the driver stimulus' jitter can be adjusted until it just reaches the maximum total jitter allowed under the compliance load shown in Figure 4-25 of Section 4.3.3.2 in the PCI Express Base Specification and re-created in Figure 3 below. The AC coupling capacitor  $C_{TX}$  can be set anywhere between 75pF and 200pF. We set  $C_{TX}$  to 100nF for all simulations because it is a popular value in the industry. Table 2 shows the resulting output measurements. The eye pattern generated in the PCI Express driver compliance test simulation can be found in [Appendix A](#), Picture 1, of this paper.

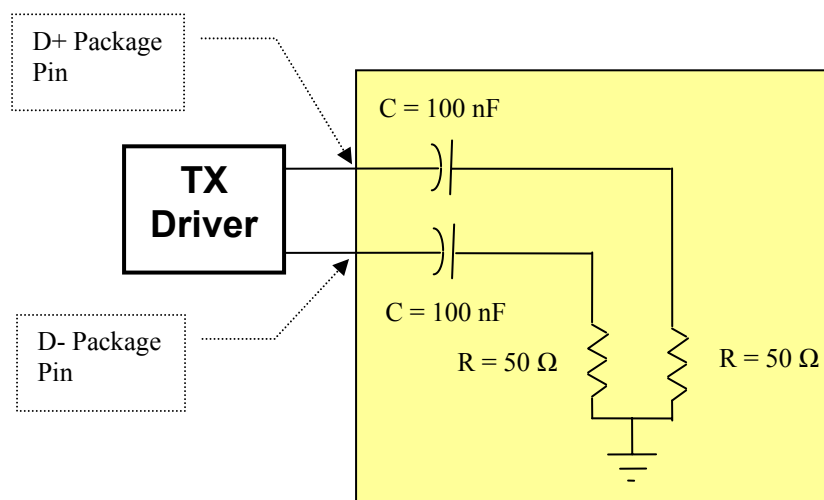


Figure 5 - PCI Express Compliance Test/Measurement load

	Vdiff <sub>p-p</sub>		Total Jitter
	Transition Bit	De-emphasized Bit	
<b>Specification</b>	≥800 mV	≥505 mV	≤60 ps
<b>Measured</b>	800 mV <sup>1</sup>	506 mV	59 ps

Table 2 – PCI Express TX Silicon + Package Measurements at Package Pin

<sup>1</sup>The PCI Express Base Specification defines X2 to 1-X2 = 0. The minimum TX height measurements were taken at mid bit.

**Series:** PCIE (PCI Express Standard Connector)  
**Standard:** PCI Express, Generation 2 (5.0 Gbps)

### Full Circuit Compliance Measurements

#### Differential Voltage and Eye Width Measurements at Receiver End

PCI Express Thru-hole Connector Final Inch Circuit	Max Jitter at UI = 400 ps	Min RX Eye Width, X1 to 1-X1 (See example mask template)	Min RX Differential Voltage, A1 to -A1 <sup>1</sup> (See example mask template)	Pass/Fail
<b>Specification</b>	<b>≤120 ps</b>	<b>≥160 ps</b>	<b>≥175 mV<sub>DIFFp-p</sub></b>	-
10.0" total trace	64 ps	177 ps	231 mV	Pass
10.5" total trace	69 ps	173 ps	196 mV	Pass
10.6" total trace	72 ps	169 ps	195 mV	Pass
10.8" total trace	76 ps	164 ps	178 mV	Pass
10.9" total trace	77 ps	164 ps	175 mV	Pass
11.0" total trace	79 ps	163 ps	170 mV	Fail

Table 3 – PCIE Series Far-end Measurements (can we update the series name in chart)

<sup>1</sup>The PCI Express Base Specification defines X2 to 1-X2 = 0. The minimum RX height measurements were taken at mid bit.

<sup>2</sup>The total trace length specified is the sum of the two differential trace lengths shown in the PCIE Series schematic, as shown in Figure 1. The edge card trace was fixed at 5.3 inches at 5.3 inches in all simulations.


The eye pattern generated in the PCI Express circuit simulation with 10.9 inches total trace length can be found in [Appendix A](#), Picture 2, of this paper.

### Conclusions


A single Samtec PCIE Series through hole connector in a board-to-edge card configuration can be used in PCI Express systems with total trace lengths not to exceed 10.9 inches when used with Samtec’s Final Inch® routing, breakout, and trace width solutions. Because loss is the dominant contributor to system degradation, designers should be aware that using smaller trace widths, laminates with higher loss tangent, and sub optimal routing solutions with higher pair-to-pair coupling and additional via stubs will decrease overall performance and the maximum allowable trace length. It is advisable, when designing systems that approach the maximum trace length limits, to perform detailed modeling, simulation, and measurement of the target design including the effects of material properties, traces, vias, and additional components.

**Series:** PCIE (PCI Express Standard Connector)  
**Standard:** PCI Express, Generation 2 (5.0 Gbps)

## Appendix A – Waveform images

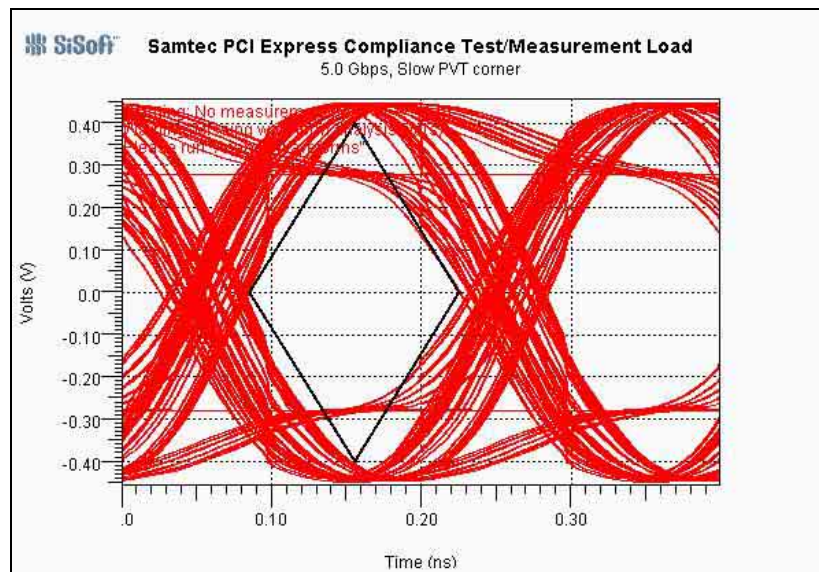

**Picture 1 – Worst case stimulus eye waveform, probed at Teraspeed driver behavioral model nodes connected to PCIE Series compliance test/measurement load**

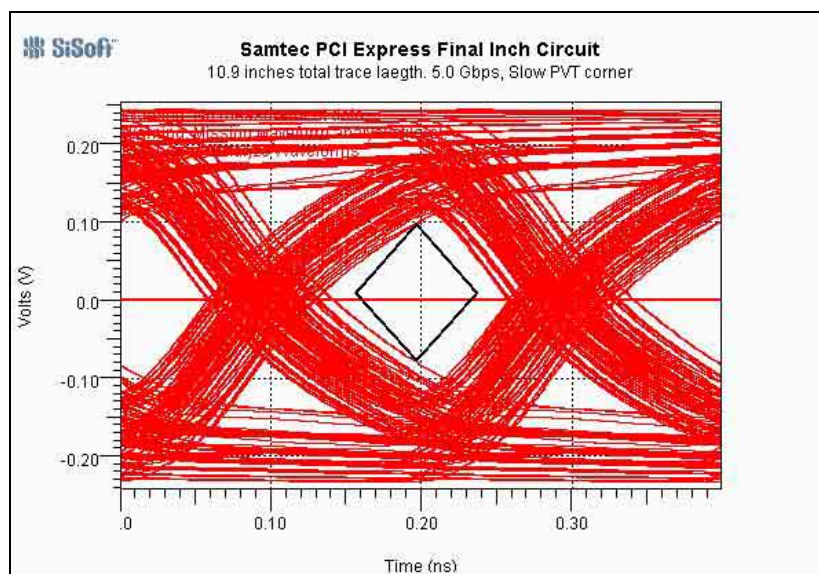

**Picture 2 – PCIE Series test circuit eye waveform, probed at receiver pads, 10.9 inches total trace length**